

On-site water disinfection technology

- Easy to install, operate and maintain
- Lower lifecycle cost
- Small footprint, adaptable and expandable
- Proven safety record
- Advanced chemistry
- Self-cleaning electrolytic cells available up to 300 lbs/day FAC

Disinfect the safe, easy and economic way

MaximOS™ uses a patented and award-winning on-site water disinfection technology that safely and economically generates sodium hypochlorite using just salt, water and power, replacing the need to purchase, transport and store dangerous chemicals. On-site generation cuts back transportation requirements by up to 80%, reduces carbon emissions and fuel consumption, and eliminates the storage and disposal of chemical containers.


MaximOS™ is used in more than 1,500 installations in hundreds of U.S. communities and over 30 countries, safely disinfecting more than 6.5 billion gallons of water per day. Parkson is committed to providing millions of customers with the safest water in the world.

With demonstrable cost-effectiveness and an environmentally friendly process, MaximOS™ is the safest investment you can make for your water treatment needs.

MaximOS™ comes in different capacities with unique features like a self-cleaning electrolytic cell, self-adjusting flow control, remote monitoring, and gives the customer the flexibility to upgrade to the superior mixed oxidant chemistry.




100 lbs./day
self-cleaning
electrolytic cell

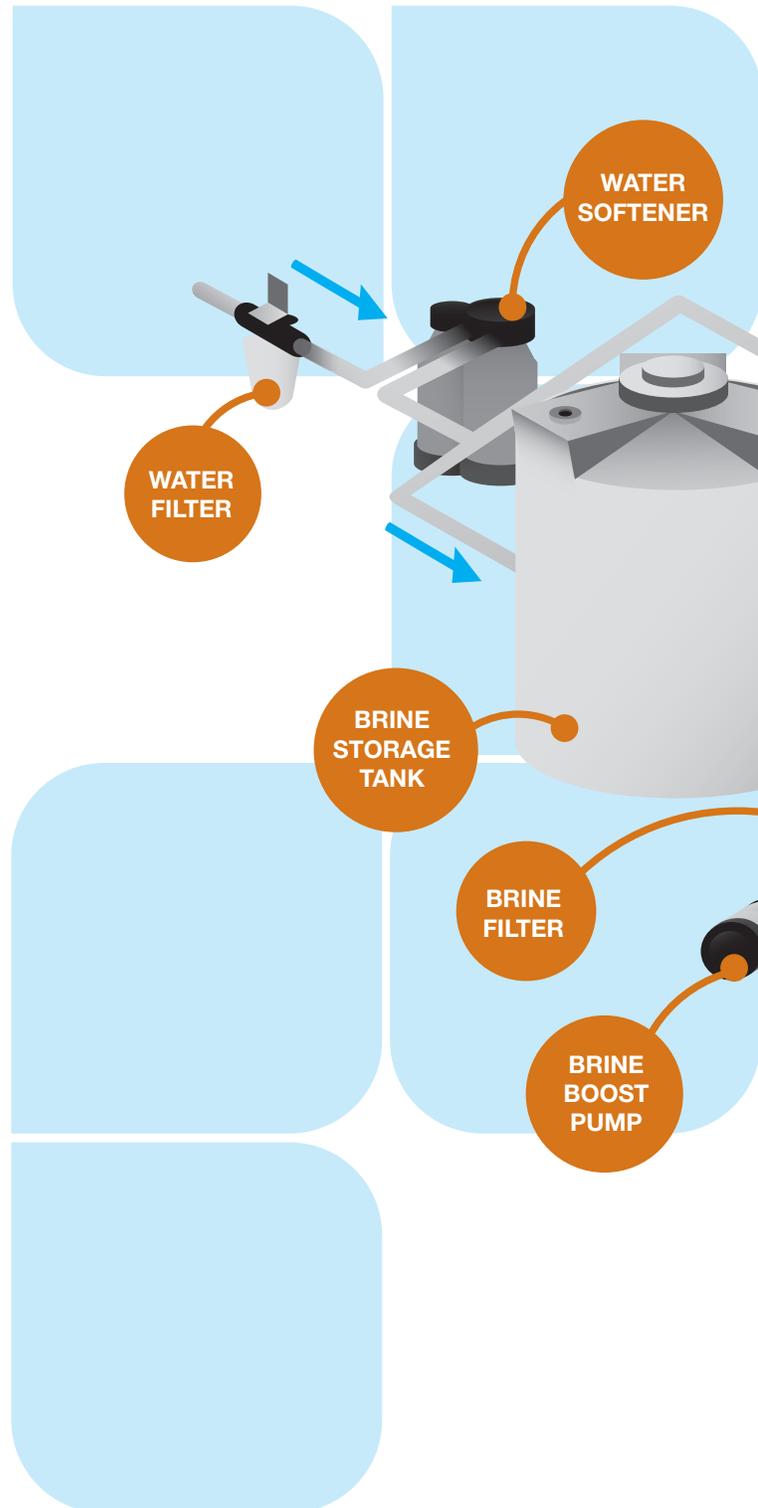



Benefits*

- Ease of maintenance: self-cleaning system doesn't require acid washing as a normal maintenance task
- Improved functionality/human interface: new touch screen display creates a common interface for all Parkson disinfection systems; remote monitoring capability; SCADA-ready
- Lower lifecycle cost: less maintenance means less labor required for system operation
- Durability: decreased sensitivity to contaminants due to self cleaning capability
- Adaptability: convertible between mixed oxidant and hypochlorite chemistries with minimal changes
- Expandability: modular cell packs allow for expansion of chlorine capacity without increasing equipment footprint
- Superior safety: electrolytic cell is enclosed in HDPE cabinet for maximum safety
- Quality construction: frame is constructed of powder-coated aluminum with roto-molded HDPE generator panels for a true corrosion-resistant design.
- Non-recirculating electrolyte loop to maximize cell module lifetime and performance
- All wiring enclosed for maximum safety

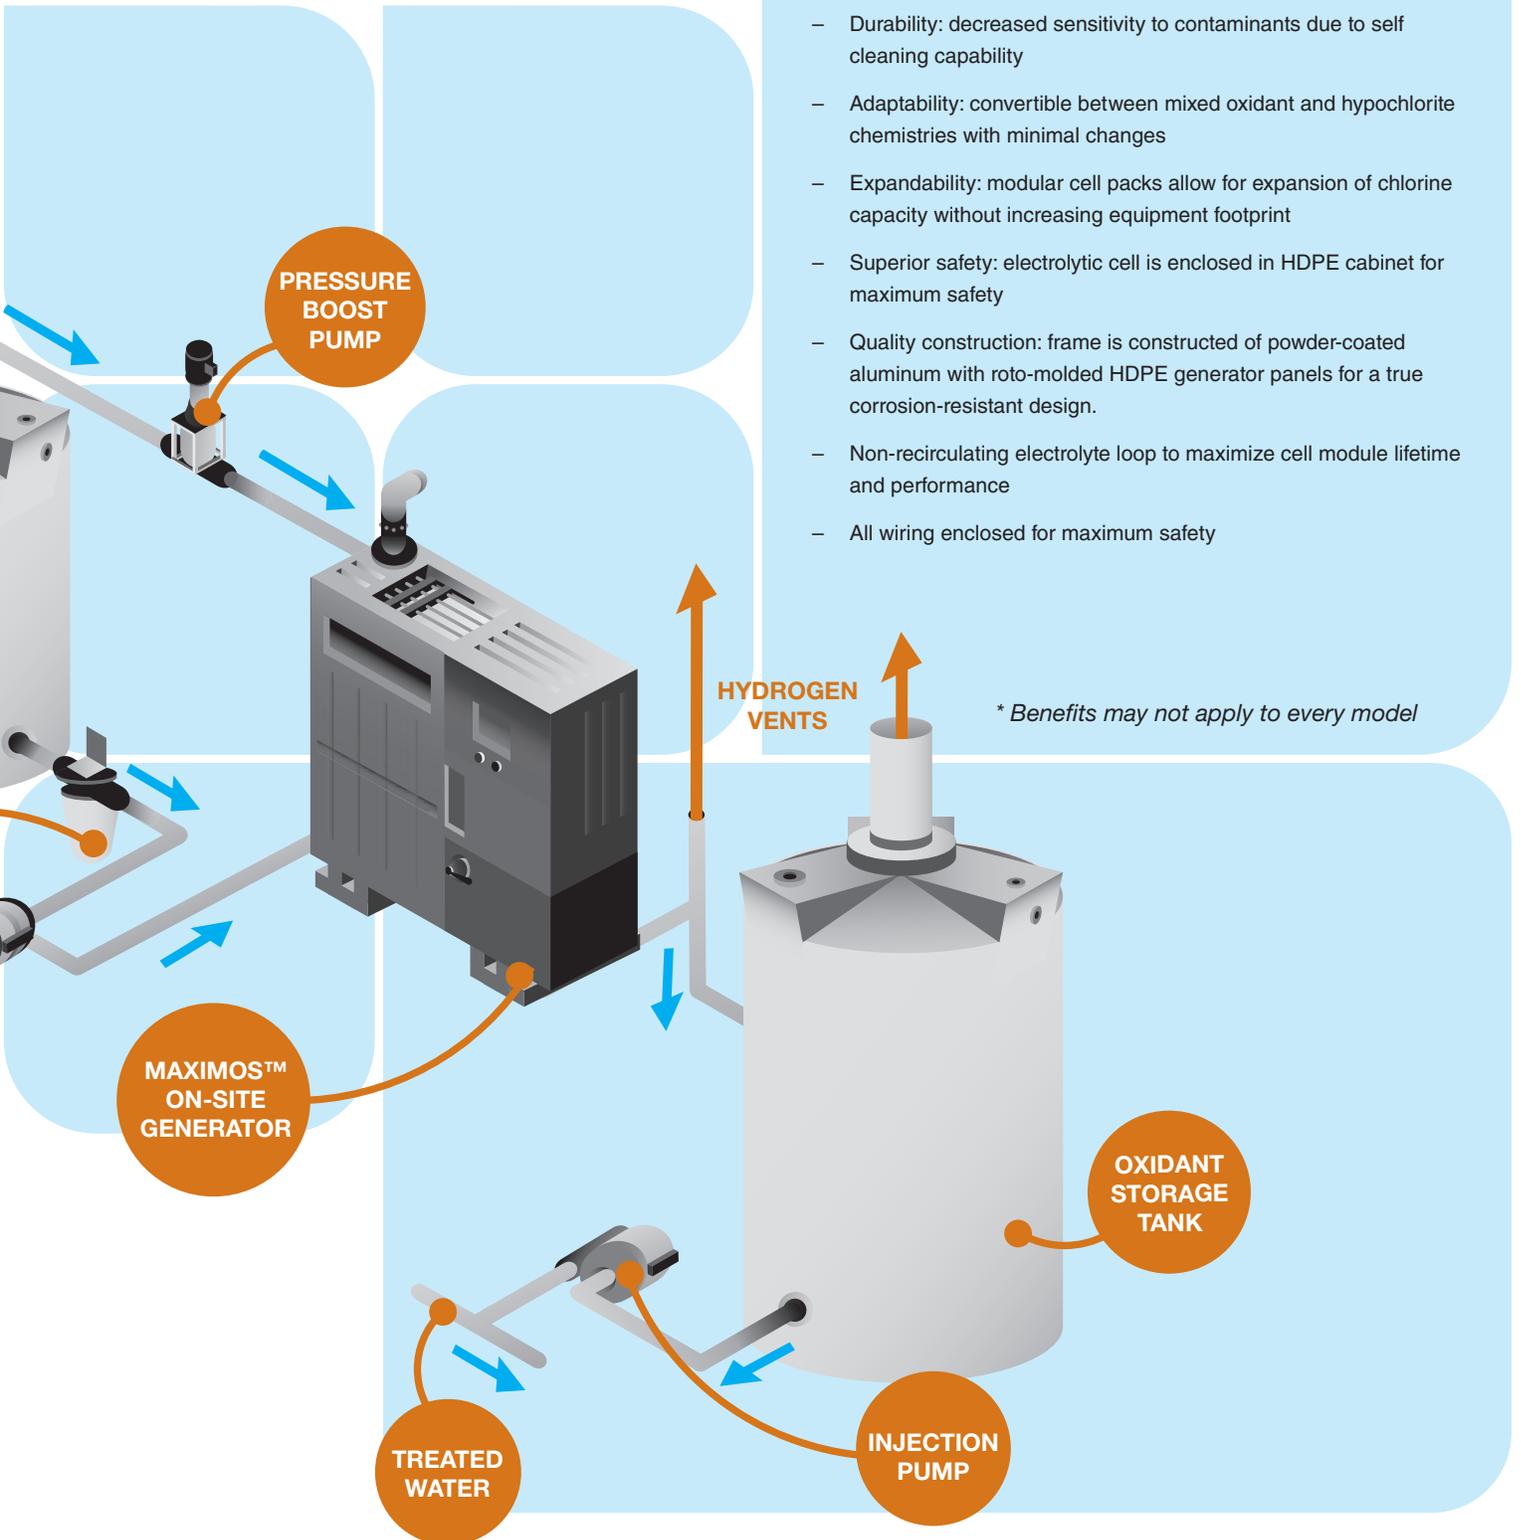

We know all treatment needs are not alike. For standard disinfection needs, we offer a state-of-the-art on-site hypochlorite generator engineered with superior salt and energy efficiencies. For more advanced treatment needs, mixed oxidant solution offers all the disinfection power of hypochlorite with additional treatment benefits.

Sodium Hypochlorite



	SH-Series	MH-Series	MH-SC Series	LH-Series
Related FAC Capacity	25 - 100 lbs/day	100 - 500 lbs/day	60 - 300 lbs/day	1,550 lbs/day
	25 lb. increments	100 lb. increments	60 lb. increments	Only option available
Self Cleaning	Available	No	Available	No
Salt Conversion (SCE)	3.0 lb salt / lb FAC (3.0 kg salt / kg FAC)	3.0 lb salt / lb FAC (3.0 kg salt / kg FAC)	2.5 salt / lb FAC (3.0 kg salt / kg FAC)	3.0 lb salt / lb FAC (3.0 kg salt / kg FAC)
Energy Conversion (ECE)	2.0 kW-hr / lb FAC (4.4 kW-hr / kg FAC)	2.0 kW-hr / lb FAC (4.4 kW-hr / kg FAC)	3.5 kW-hr / lb FAC (4.4 kW-hr / kg FAC)	2.0 kW-hr / lb FAC (4.4 kW-hr / kg FAC)
FAC Concentration	6,500 or 8,000 mg/L	8,000 mg/L	4,500 mg/L	8,000 mg/L
Flow Rate	19 - 76 gph (± 15%)	75 - 375 gph		1,200 gph
	71.25 - 285 lph (± 15%)	284 - 1420 lph		4,543 lph
Electrical Service	220 VAC, 1 ph, 30A	480 VAC, 3ph, 100A main		480 VAC, 3 ph, 400A main

Mixed Oxidants

	SM-Series	MM-Series	LM-Series
Rated FAC Capacity	15 - 60 lbs/day	60 - 300 lbs/day	1,000 lbs/day
	15 lb. increments	60 lb. increments	Only option available
Self Cleaning	Yes	Yes	No
Salt Conversion (SCE)	3.0 lb salt / lb FAC (3.0 kg salt / kg FAC)	2.5 lb salt / lb FAC (2.5 kg salt / kg FAC)	3.0 lb salt / lb FAC (3.0 kg salt / kg FAC)
Energy Conversion (ECE)	3.0 kW-hr/lb FAC (6.6 kW-hr/kg FAC)	3.5 kW-hr / lb FAC (7.7 kW-hr / kg FAC)	3.0 kW-hr/lb FAC (6.6 kW-hr/kg FAC)
FAC Concentration	4,500 mg/L		
Flow Rate	20- 80 gph (± 15%)	75 - 375 gph	1,200 gph
	75 - 300 lph (± 15%)	284 - 1420 lph	4,543 lph
Electrical Service	220 VAC, 1 ph, 30A per module	480 VAC, 3 ph, 100A main	480 VAC, 3 ph, 400A main



Fort Lauderdale
Chicago
Montreal
Mumbai

1.888.PARKSON
disinfection@parkson.com
www.parkson.com